SUNNEN MBB-1660 SPECIFICATIONS

I.D. Range:

.0600 to 6.5000 in (1,50 to 165 mm)

Length Range:

Hones bores up to 16 in (400 mm) in length depending on diameter

Spindle Speeds:

200, 250, 320, 400, 500, 640, 800, 1000, 1270, 1600, 2000, 2500 rpm

Setup Time:

10 minutes

Spindle Motor:

.5 HP (0.375 kW)

Spindle Brake: Self-energizing band-type

Honing Oil Pump: Utilizes spindle drive motor

Honing Oil Capacity: 16 gallons (60 liters)

SUNNEN WORLDWIDE

Sunnen Products Company World Headquarters St. Louis, MO – USA Phone 1.314.781.2100 1.314.781.2268 Fax Toll Free 1.800.325.3670 Email sunnen@sunnen.com www.sunnen.com Switzerland – Sunnen AG Phone +41 71 649 33 33 +41 71 649 33 34 Fax Email info@sunnen.ch www.sunnen.ch Italy - Sunnen Italia S.r.l.

Phone +39 02 383 417 1 Fax +39 02 383 417 50 Email sunnen@sunnenitalia.com www.sunnenitalia.com

+48 22 814 34 28 Email sunnen@sunnen.pl www.sunnen.pl

Phone +48 22 814 34 29

France - Sunnen SAS

Fax

Fax

Email

Fax

Email

Email

Phone +33 01 69 30 0000

+33 01 69 30 1111

info@sunnen.fr

www.sunnen.fr

Belgium - Sunnen Benelux BVBA Phone +32 38 80 28 00

+32 38 44 39 01

info@sunnen.be

www.sunnen.be

hemel@sunnen.co.uk

www.sunnen.co.uk

Poland - Sunnen Polska Sp. z o.o.

UK – Sunnen Products Ltd.

Phone +44 1442 39 39 39 +44 1442 39 12 12

Filter System: Optional PF-150 filter available

Floor Space:

30 in (762 mm) wide 60 in (1524 mm) deep 63 in (1600 mm) high

Electrical System Options:

MBB-1660, 1-phase: 115/230V, 60 Hz or 220V, 50 Hz MBB-1660, 3-phase: 230/460V, 60 Hz or 220/380V, 50 Hz or 440V, 50 Hz (Can be supplied for any frequency or voltage for which motors are available.)

Weight (with honing oil): 630 pounds (287 kilograms)

Color:

Pearl Gray


A LEGACY OF EXCELLENCE SINCE 1924.

Russia	a – Sunnen RUS
Phone	+7 495 258 43 43
Fax	+7 495 258 91 75
Email	sunnen@sunnen-russia.r
	🖉 www.sunnen.ru
Czech	Republic – Sunnen s.r.o.
Phone	
Fax	+420 383 376 316
Email	sunnen@sunnen.cz
	www.sunnen.cz
China	– Shanghai Sunnen
	Mechanical Co. Ltd.
Phone	+86 21 5813 3990
Fax	+86 21 5813 2299

shsunnen@sunnensh.com Email www.sunnensh.com

Sunnen and the Sunnen logo are regi rademarks of Sunnen Products Com ©2010 Sunnen Products Company Printed in USA 4/10- POD X-MAN-5100K



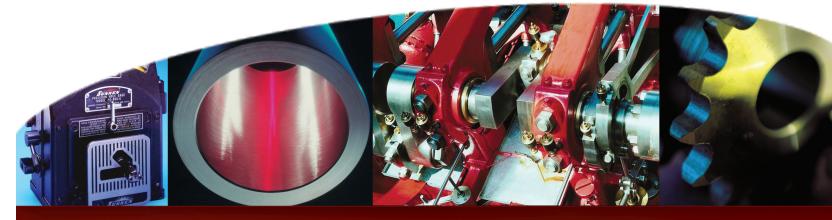



Sunnen reserves the right to change or revise specifications and product design in connection with any feature of our products contained herein. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment, supplies or accessories previously sold. Information contained herein is considered to be accurate based on available information at the time of printing. Should any discrepancy of information arise, Sunnen recommends that user verify the discrepancy with Sunnen before proceeding.

MBB-1660 BASIC HONING MACHINE

THE SUNNEN MBB-1660 IS THE MOST VERSATILE, ECONOMICAL BORE SIZING MACHINE YOU CAN PUT IN YOUR SHOP.

MULTIPLE LAND & TANDEM BORES

KEYWAY BORES

BLIND-END BORES

THINWALL PARTS

The Sunnen[®] MBB-1660 hones bores of any configuration. .060 in. to 6.500 in. (1.5 to 165 mm) in diameter. 1/8 in. to 16 in. (3 to 400 mm) long. In regular or odd-

> shaped parts and any material, the MBB-1660 guarantees precision sizing and geometric accuracy with the surface finish you need. And it doesn't cost much! Add all these basics together and you have the most versatile, economical bore sizing/finishing machine you can put in your shop.

With the MBB-1660 in your shop you are ready for any kind of I.D. work that comes along. Whether you are honing half a dozen pieces or several hundred, a job you've never run before or a re-

peat job, production or salvage, you can set up and start honing without delay or a lot of expense. In many cases, this machine pays for itself on the first two or three jobs. The Sunnen[®] MBB-1660 is the biggest bargain in the industry.

The Sunnen MBB-1660 iuses a simple 3-step operation:

1. You gage the bore.

·kn

2. You set the honing dial for the amount of stock to be removed.

3. You hone until the dial says zero.

Setup takes only about 10 minutes. You change from one job to another that quick. You don't have to worry about fixtures, indexing, special tooling or critical tool adjustments.

Easy-to-read charts and tables show you clearly and quickly which tooling, stones, speeds, and cutting pressures to use.



There are ten common bore errors that are caused by machining, heat treat or chucking. All of them can be corrected quickly and easily on the Sunnen MBB-1660.

The really important thing is that the Sunnen honing clears up these bore errors with the least possible stock removal. In many cases, this is the difference between scrapping or saving a run of expensive pieces.

it consistently, piece after piece. You control bore quality with Sunnen honing because you control roundness, straightness, size and finish... .the elements which make up bore quality.

Sunnen tooling and accessories make honing easier and more efficient

Ask your Sunnen representative or visit www.sunnen.com for your free catalog of Precision Honing Supplies. The catalog has complete information on Sunnen's industry-leading tooling and abrasives. Besides abrasives and tooling, you will find information on other accessories to make your job easier and efficient such as honing oils and gaging. Sunnen Industrial Honing Oil is specially formulated to deliver faster cutting, maximum stone life and the finest finish. The Sunnen precision PG series bore gages are a unique all-mechanical system ... just dial your size on the setting fixture and transfer it to the gage. Complete

set-up takes less than two minutes.

All the information you need is in the Precision Honing Supplies catalog.

HEAVY OR ODD SHAPED PARTS

SUNNEN SETS THE STANDARD FOR ACCURACY

Sunnen honing machines, no matter how basic, are known worldwide for their honing accuracy.

One reason is the unique three-point Sunnen mandrel design with one stone and two unevenly spaced guide shoes. This design enables Sunnen tooling to produce extremely round bores with the least possible stock removal. Eliminating taper and out-of-round makes bore sizing down to .0001 in (.00025 mm) a routine matter.

Another key to consistent, accurate honing performance is Sunnen's premium honing stones which are manufactured under the most exacting quality control standards in the industry. From aluminum to silicon carbide to diamond and CBN, Sunnen offers a large selection of bond types, grain sizes and stone configurations to fit any application.

As always, Sunnen honing gives you any finish you need down to 2 microinches (0,05 microns) and you get

